

## F4P3225P TYPE


### ●FEATURE

1. Common mode for power line
2. Compatible with high-density portable devices


### ●Applications

1. Power line noise countermeasure for various electronic equipment.

### ●Shape and Dimension

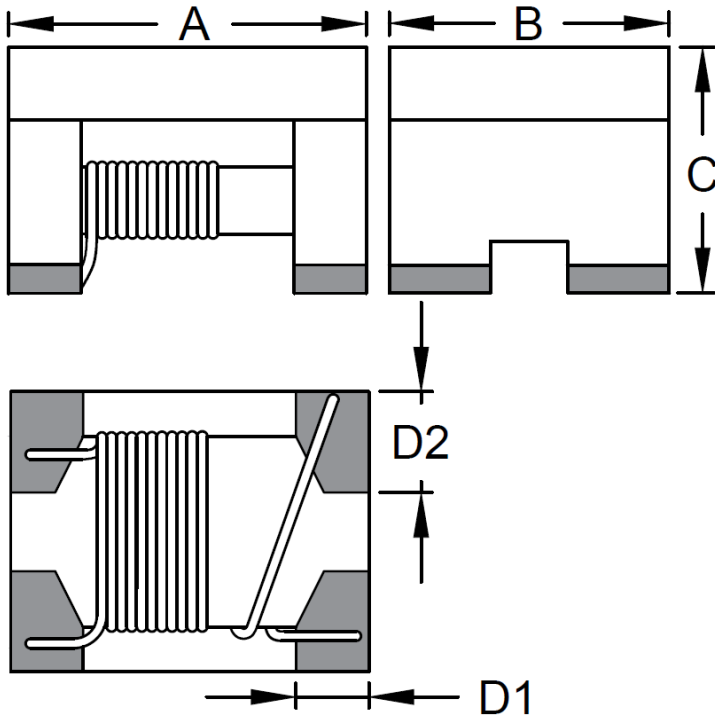

### ●Schematics and Land Patterns(mm)

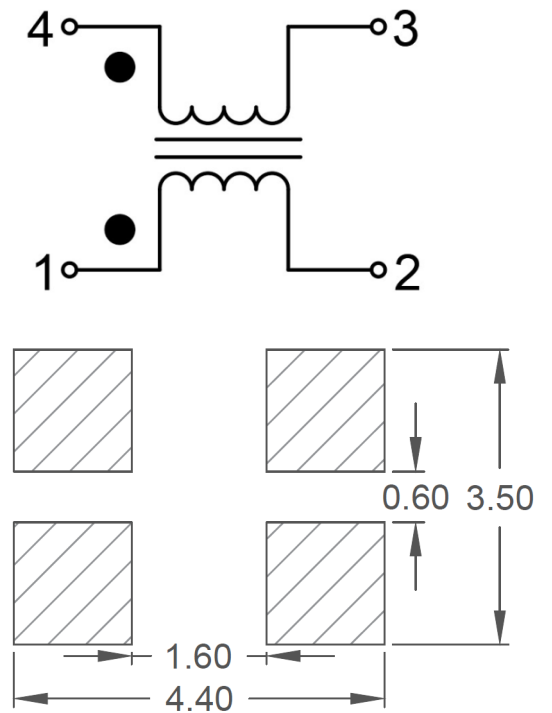

A=3.20±0.20mm ; B=2.50±0.20mm ; C=2.20±0.20mm ; D1=0.65mm Ref. ; D2=0.90mm Ref.

### ●Specification





PART NO.	Common Mode Impedance (Ω) at 100MHz	Rated Current (A) Max.	Rated Voltage (Vdc)	Insulation Resistance (MΩ) Min.	Withstand Voltage (Vdc)	DC Resistance (Ω) Max.
F4P3225P-900	90±25%	3.0	80	10	125	0.06
F4P3225P-201	200±25%	2.0	80	10	125	0.08
F4P3225P-501	500±25%	2.0	80	10	125	0.08
F4P3225P-102	1000±25%	1.5	80	10	125	0.10

Note1. Measurement ambient temperature of electrical : at 20°C


Note2. Test equipment: HP4294A

Note3. Packaging: Taping ; Quantity: 2000 Pieces/Reel


● Performance Curves(Impedance VS Frequency)

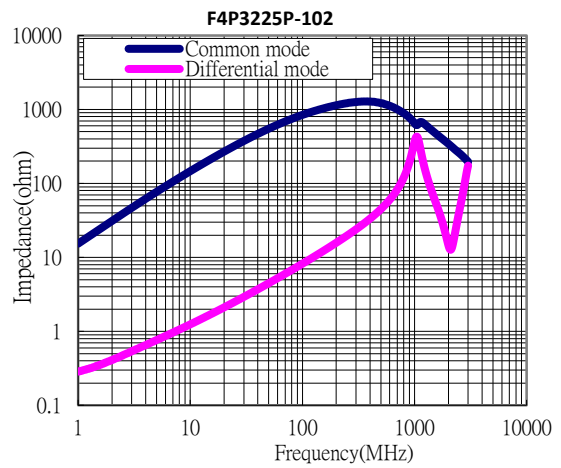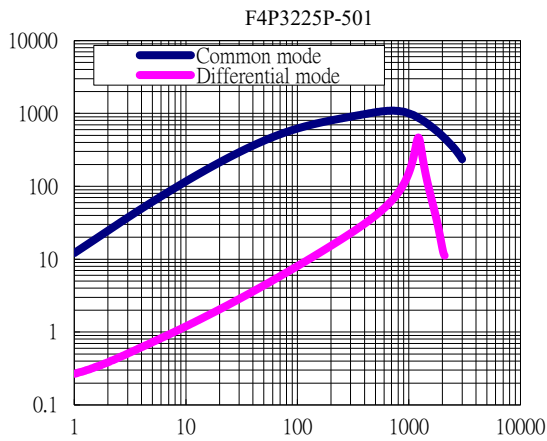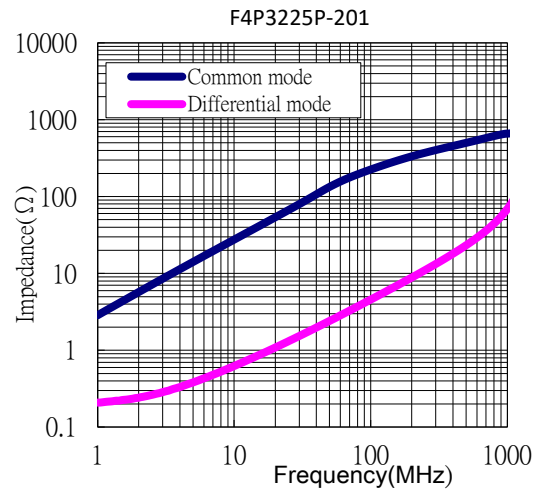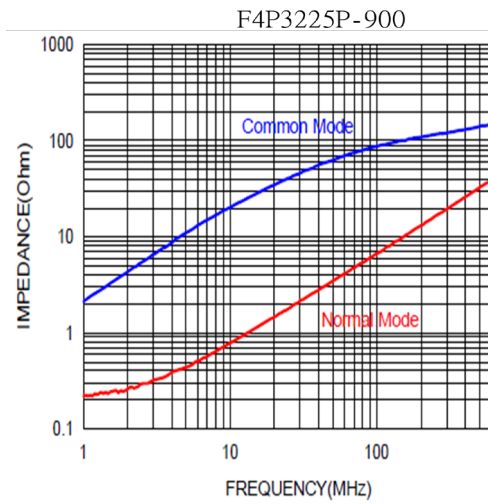

● Test circuit




COMMON MODE




NORMAL MODE

## GENERAL CHARACTERISTICS

- Operating temperature range: -40 TO + 125°C(Includes temperature when the coil is heated)
- External appearance: On visual inspection, the coil has no external defects.
- Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.  
Terminal should not peel off. (refer to figure at right) 0.5kg Min –F4P4532EL.
- Insulating resistance: Over 100MΩ at 100V D.C. between coil and core.
- Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
- Temperature characteristics: Inductance coefficient  $(0\sim 2,000)\times 10^{-6}/^{\circ}\text{C}$ (-25~+80°C) , inductance deviation within±5.0%, after 96 hours.
- Humidity characteristics(Moisture Resistance): Inductance deviation within ±5%, after 96 hours in 90~95% relative humidity at  $40 \pm 2^{\circ}\text{C}$ and 1 hour drying under normal condition.
- Vibration resistance: Inductance deviation within ±5%, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
- Shock resistance: Inductance deviation within ±5%, after being dropped once with 981m/s<sup>2</sup> (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
- Resistance to Soldering Heat: 260°C, 10 seconds(See attached recommend reflow)
- Storage environment: Storage condition: Temperature Range: 10°C ~ 35°C (Generally: 21°C ~ 31°C) , Humidity Range: 50% ~ 80% RH (Generally: 65% ~ 75%) ; Transportation condition: Temperature Range: -35°C ~ 85°C , Humidity Range: 50% ~ 95% RH
- Use components within 12 months. If 12 months or more have elapsed, check solderability before use.
- Reflow profile recommend:



Lead-free heat endurance test

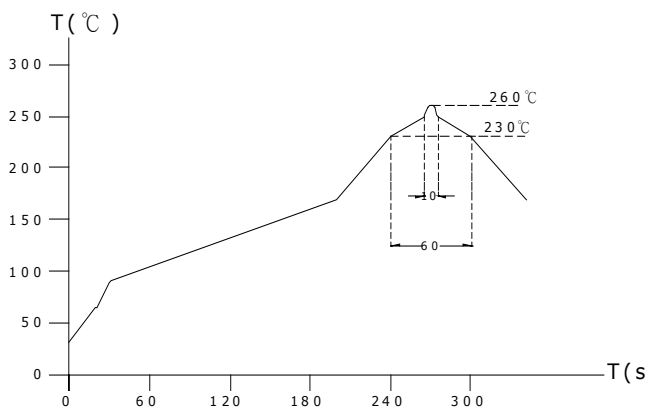

Lead-free the recommended reflow condition

