

**PIT07030Q1 TYPE**


● FEATURE

1. Shielded construction
2. Low Buzz Noise
3. AEC-Q200 Qualified

● Applications


1. Server, High current power supplies, DC/DC converters

● Shape and Dimension

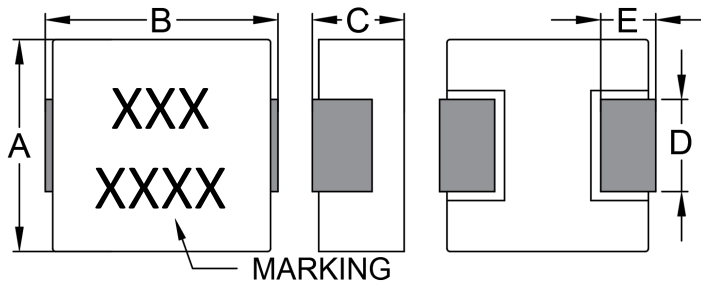

A=6.60±0.30mm ; B=7.30±0.30mm ; C=3.00mm Max ; D=3.00±0.30mm ; E=1.80±0.30mm ;

● Schematics and Land Patterns(mm)

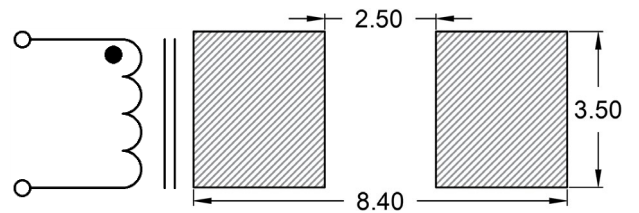

● Specification

P/N	L (uH)	RDC (mΩ) Max.	Isat (A)	Irms (A)
PIT07030Q1-R10N	0.10±30%	1.7	60.00	32.50
PIT07030Q1-R15N	0.15±30%	1.9	45.00	27.00
PIT07030Q1-R22M	0.22±20%	3.2	34.00	21.00
PIT07030Q1-R33M	0.33±20%	2.8	40.00	23.00
PIT07030Q1-R47M	0.47±20%	4.2	26.00	17.50
PIT07030Q1-R56M	0.56±20%	5.0	25.50	16.50
PIT07030Q1-R68M	0.68±20%	5.5	25.00	15.50
PIT07030Q1-1R0M	1.00±20%	10.0	22.00	11.00
PIT07030Q1-1R5M	1.50±20%	15.0	18.00	9.00
PIT07030Q1-2R2M	2.20±20%	20.0	14.00	8.00
PIT07030Q1-3R3M	3.30±20%	30.0	13.50	6.00
PIT07030Q1-4R7M	4.70±20%	40.0	10.00	5.50
PIT07030Q1-5R6M	5.60±20%	48.0	9.00	5.00
PIT07030Q1-6R8M	6.80±20%	60.0	8.00	4.50
PIT07030Q1-8R2M	8.20±20%	68.0	7.50	4.00
PIT07030Q1-100M	10.0±20%	85.0	6.00	3.50
PIT07030Q1-150M	15.0±20%	123.0	4.00	3.00

P/N	L ( $\mu$ H)	RDC (m $\Omega$ ) Max.	Isat (A)	Irms (A)
PIT07030Q1-220M	22.0 $\pm$ 20%	190.0	3.50	2.00
PIT07030Q1-330M	33.0 $\pm$ 20%	240.0	2.50	2.00
PIT07030Q1-470M	47.0 $\pm$ 20%	363.0	2.00	1.75

Note1. Measurement frequency of Inductance value : at 100kHz, 1.0V

Note2. Measurement ambient temperature of L, DCR and IDC : at 25°C

Note3. Isat: DC current at which the inductance drops 20%(Typ.) from its value without current


Note4. Irms: Average current for 40°C temperature rise from 25°C ambient(Typ.)

Note5. Packaging: Taping ; Quantity: 1000 Pieces/Reel

## GENERAL CHARACTERISTICS

1. Operating temperature range: -55 TO + 125°C (Includes temperature when the coil is heated)
2. High temperature exposure(storage) refer MIL-STD-202 Method 108: 1000 hrs at rated operating temperature(e.g. 125°C). Part can be stored for 1000 hrs @125°C. Unpowered. Measurement at 24±4 hours after test conclusion.
3. Temperature cycling refer JESD22 Method JA-104: 1000 cycles(-55 TO + 125°C). Measurement at 24±4 hours after test conclusion. 30 min maximum dwell time at each temp. extreme. 1 min. maximum transition time.
4. Biased Humidity refer MIL-STD-202 Method 103: 1000 hours 85°C/85%RH. Unpowered. Measurement at 24±4 hours after test conclusion.
5. Operational Life refer MIL-PRF-27: 1000 hrs. at 125 °C tested. Measurement at 24±4 hours after test conclusion.
6. External Visual refer MIL-STD-883 Method 2009: Inspect device construction, marking and workmanship.
7. Physical Dimension refer JESD22 Method JB-100: Verify physical dimensions to the applicable device detail specification.
8. Resistance to Solvents refer MIL-STD-202 Method 215: Add aqueous wash chemical - OKEM clean or equivalent.
9. Mechanical Shock refer MIL-STD-202 Method 213: Figure 1 of Method 213. Condition C.
10. Vibration refer MIL-STD-202 Method 204: 5g;s for 20 minutes, 12 cycles each of 3 orientations. Test from 10-2000 Hz.
11. Resistance to soldering Heat refer MIL-STD-202 Method 210: Condition B No pre-heat of samples. Single wave solder-procedure 2 for SMD and procedure 1 for leaded with solder within 1.5mm of device body.
12. ESD refer AEC-Q200-002 or ISO/DIS 10605: Direct contact discharge 2kV.
13. Solderability refer J-STD-002: For both Leaded & SMD. Magnification 50X. Conditions: Leaded, Method A@235°C,category 3 ; SMD, a)Method B, 4hrs@125°C dry heat @235°C, b)Method B@215°C category 3., c)Method D category 3@260°C
14. Electrical Characterization refer spec: Show Min, Max Mean and Standard deviation at room from Min and Max temperature.
15. Flammability refer UL-94: V-0 or V-1 Acceptable.
16. Board Flex refer AEC-Q200-005: 60 sec minimum holding time.
17. Terminal Strength(SMD) refer AEC-Q200-006
18. Reflow profile recommend:

Lead-free heat endurance test

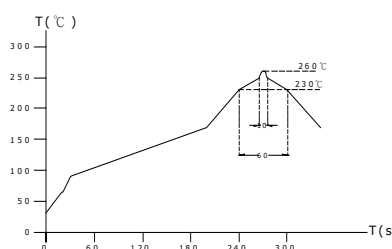

Lead-free the recommended reflow condition

